

# Introducing **FireblockWall™**

Stops fire. Saves time.


Introducing the first and only reusable modular one-hour fire rated containment solution. FireblockWall™ is 50% faster to install than traditional drywall.

# FireblockWall™

No other temporary containment solution can compete with STARC. Our newest solution, FireblockWall™, raises the standard – again. FireblockWall™ is the first modular reusable one-hour fire rated containment that replaces traditional drywall, and it can be installed in half the time of traditional methods. We deliver value beyond your expectations. Consider all the ways you and your clients will benefit with FireblockWall™ :

- The **only** modular, reusable one-hour fire rated solution available; exceeds ASTM E-119 and ASTM E-84 requirements.
- **Fast.** Reduce containment installation time up to 50% compared to drywall.
- **Safe.** Containment that stops fire, exceeds ICRA Class IV infection control standards and helps stop the spread of construction dust.
- **Reusable.** Pays for itself in two to four uses.
- **Flexible and great looking** for any pre-built environment.

## Solution Overview

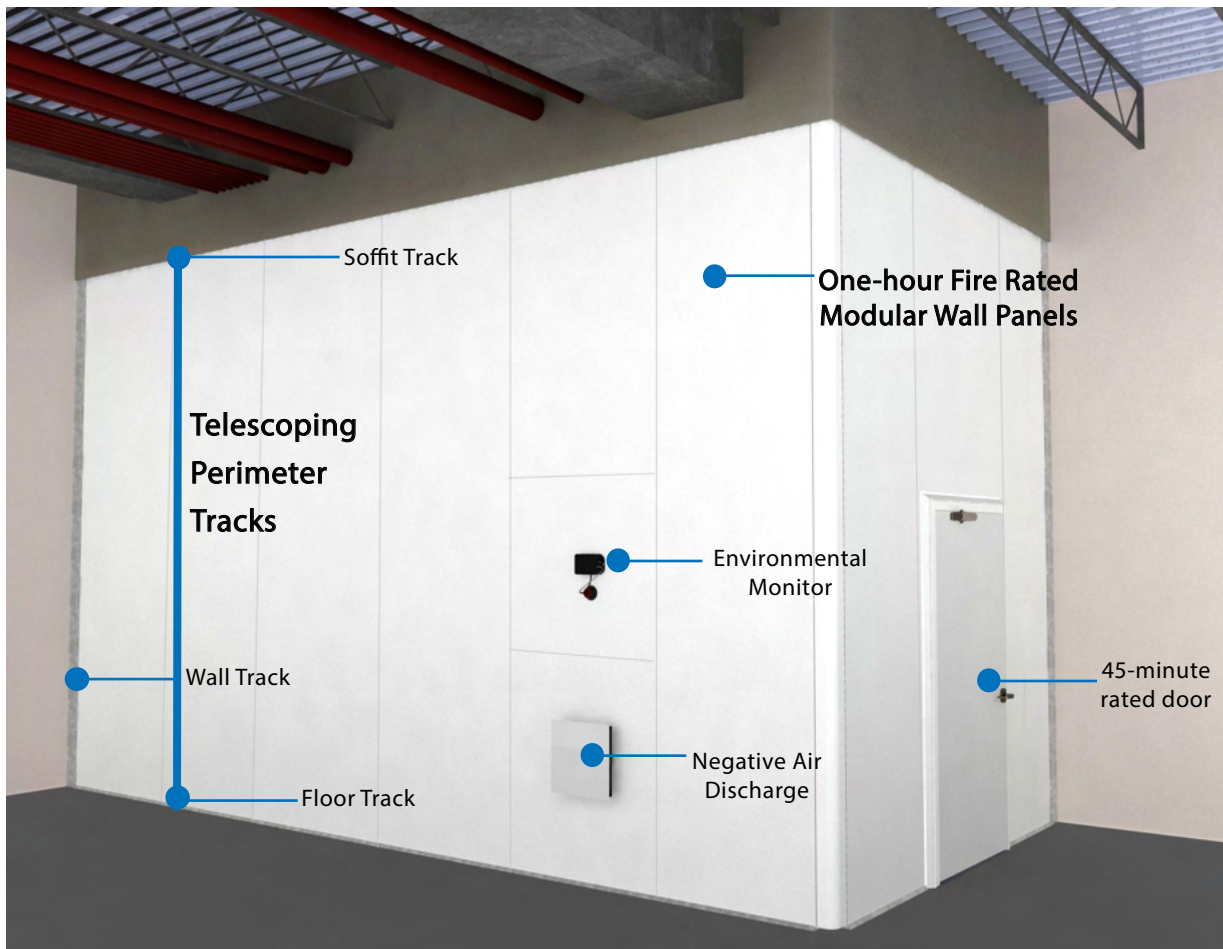


# Benefits

## ASTM E-119 AND ASTM E-84 Certified Panels Rugged Steel Construction

### Proprietary Inner Core

Fire and sound blocking



### Flexible Panel Dimensions

Dimensions that fit ceiling heights 8' to 9'-10" and panel widths of 6", 12", 24".

### Lift & Drop Connection

Tongue and groove. No tools required. Creates airtight, fireproof connection while decreasing set-up time.



### Negative Air Panel

Engineered for fire safety and for exceeding ICRA-IV requirements.




Flat Panel Diffuser

12" rated fire and smoke damper; fusible link closes damper at 165 degrees.

## Telescoping, Segmented Tracks

"Snap-cut" tracks for creating wall and soffit tracks to any length needed. 100% reusable.

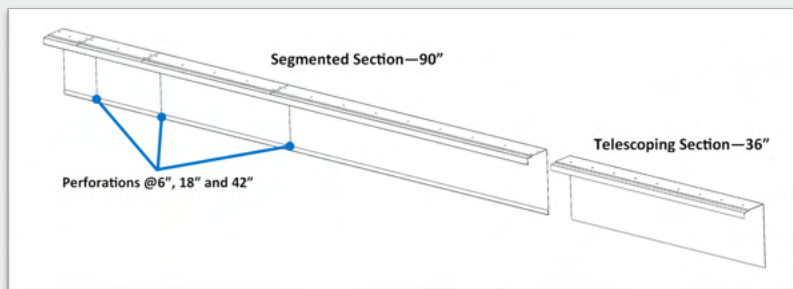

Soffit Track



Wall Track



Floor Track